



PL 1 6B04 102479

GB04/02479

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road

Newport

South Wales

NP10 8QQ

REC'D 20 JUL 2004

WFO

PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

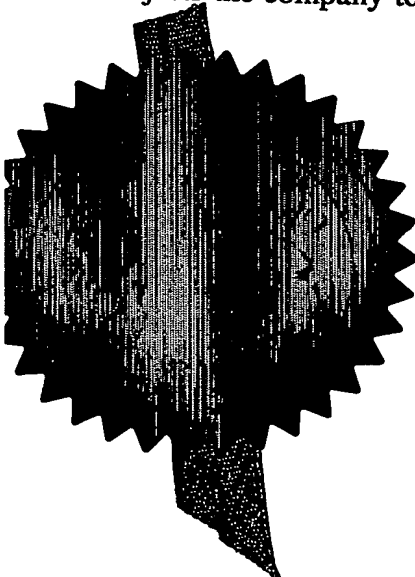

Signed


Stephen Hordley

Dated 8 July 2004

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

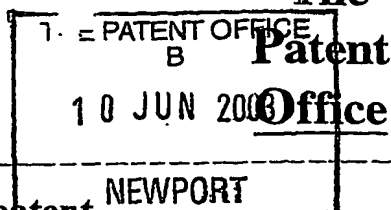

The
Patent
Office

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get
an explanatory leaflet from the Patent Office to help
you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

10 JUN 2003

11270P4 GB/CMB

2. Patent application number

(The Patent Office will fill in this part)

0313296.6

10JUN03 E813644-1 D02903

P01/7700 0.00-0313296.6

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

Reckitt Benckiser N.V.
Kantoorgebouw De Appelaer
De Fruittuinen 2-12
2132 NZ Hoofddorp
NETHERLANDS

Patents ADP number (if you know it)

07921075005

If the applicant is a corporate body, give the
country/state of its incorporation

Netherlands

4 Title of the invention

Automatic Washing Machine Detergent Dispensing Device

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Craig Bowers
Reckitt Benckiser plc
Group Patents Department
Dansom Lane
Hull
HU8 7DS
United Kingdom

Patents ADP number (if you know it)

07799521001

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application
(day / month / year)

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	29
Claim(s)	5
Abstract	1
Drawing(s)	6 + 6 <i>ph</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents
Translations of priority documents
Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and search (*Patents Form 9/77*)
Request for substantive examination (*Patents Form 10/77*)
Any other documents (*please specify*)

One /

One /

FS1 / *ph*

11.

I/We request the grant of a patent on the basis of this application

Signature

Date

Craig Bowers
Craig Bowers

9 June 2003

12. Name and daytime telephone number of Person to contact in the United Kingdom

Craig Bowers (01482) 583730

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Further if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet the relevant part(s)". Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patents Office.

Automatic Washing Machine Detergent Dispensing Device

The present invention is related to an automatic washing machine detergent dispensing device, particularly for receiving and holding a detergent composition and / or additive and for dispensing said detergent / additive into an automatic washing machine over a plurality of washing cycles.

In automatic dishwashing machines, the detergent, whether in powder, tablet or gel form, is usually filled manually by the user into the machine, in particular into a detergent holder, before each dishwashing operation.

This filling process is inconvenient, with the problem of exact metering of the detergent and possible spillage thereof, for powder and gel detergents. Even with detergents in tablet form, wherein the problem of accurate dosing is overcome, there is still the necessity of handling the dishwashing detergent every time a dishwashing cycle is started. This is inconvenient because of the usually corrosive nature of dishwasher detergent compositions.

A number of devices are known for holding unit doses of a detergent composition or additive, such as detergent tablets, and for dispensing of such unit doses into a machine.

For example, WO 88/06199 discloses a loader for holding and dispensing a washing additive including a receptacle in

which there is a plurality of compartments each for receiving washing additive tablets. The compartments are at least partially defined by partitions forming part of a body, which is movable to bring each tablet adjacent to an opening provided in the receptacle. The tablets then pass through the opening to be dispensed, preferably under force of gravity.

DE 43 44 205 A1 describes a device for dispensing detergent tablets. The dosing device is mounted on the door of a dishwashing machine and loaded with a number of detergent tablets. The dosing device has an ejector for dispensing a single tablet each time the dishwashing machine is used. In a preferred embodiment, the dosing device has a reception shaft for receiving the detergent tablets one after the other, with the ejector being located at the bottom end of the shaft.

WO 01/07703 discloses a device for the metered release of a detergent composition or additive into a dishwashing machine having a number of separate closed chambers for holding the detergent composition or additive and means for opening the chambers, activated by conditions within the machine.

However, each of these devices suffers from several disadvantages.

Although the devices solve some of the problems outlined above, the devices have to be complex in order to ensure that the correct detergent / tablet dose is discharged into the dishwasher cycle at the correct time. This level of

complexity is exacerbated by the variation in dishwasher cycle length and temperature present in the many differing automatic dishwasher devices present in the market place. The level of complexity required increases the cost of the devices and reduces the level of benefit provided to the consumer.

Furthermore, space inside an automatic dishwasher is typically at a premium. Normally the external dimensions of the device are limited by what a consumer will tolerate in the kitchen / utility room. At the same time the consumer has high demands in terms of the amount of houseware which can be washed in a dishwasher cycle. Thus space inside the machine is directed towards maximum accommodation of houseware. This means that there is only a very limited amount of space available for a device within the dishwasher. This is not a problem for a small device such as a dishwasher tablet (which dissolves during the wash anyway) or a small / slender device such as a fragrance emanator but is a problem for the devices described above. This problem is compounded as the high level of complexity increases the size of the device.

There is still a need to have a simple device which can release the required amount detergent to achieve good cleaning but which is simple and therefore neither costly nor bulky.

According to a first aspect of the present invention there is provided a portable automatic dishwasher detergent dispensing device comprising a body enclosing a detergent, sufficient for a plurality of wash cycles, the body having

an inlet aperture to allow wash liquor to contact the detergent and an outlet aperture to allow the detergent loaded wash liquor to exit the body and means to close one or both of the apertures at or before the start of the dishwasher rinse cycle.

The device according to the invention offers great ease for the consumer as this device provides a multi-dose detergent apparatus which the consumer can place in an automatic dishwasher machine and operate the machine, without further detergent addition, for a plurality of wash cycles.

The device is able to provide effective dosing of detergent over a plurality of wash cycles. More particularly the device is able to release an appropriate amount of detergent in each dishwasher cycle so that effective washing can be performed without there being any detrimental effect on the rinsing operation of the automatic dishwasher.

Generally the aperture closing means comprises a component which reacts to a change in the conditions of the dishwasher for the duration of the dishwasher washing cycle.

One of the most significant condition changes during a dishwasher wash cycle is the temperature inside the machine, with a cycle typically including a number of distinct temperature zones. Thus optionally the component reacts to a change in temperature / is temperature sensitive.

Preferably the temperature sensitive component is a thermal activator. In this context a thermal activator is recognised as a member which is able to convert thermal energy, associated with changing temperature, into mechanical energy. More preferably the thermal actuator alters its form with a change in temperature.

Preferred examples of thermal activators include thermal bimetals, wax activators and shape memory alloys.

Thermal bimetals typically comprise a structure formed from two different metals / alloys arranged in a layered formation. The combination of different metals / alloys causes the temperature dependent configuration: as most different metals have different temperature expansion properties the thermal bimetal commonly becomes distorted with changing temperature.

Thermal bimetals find use in devices where a temperature dependent operation is required, such as in a car direction indicator, where the flow of current through the strip causes the strip to heat up and change from a low temperature configuration to a high temperature configuration and in doing so breaks the circuit to the indicator bulb. Cooling of the strip allows the strip to resume its low temperature configuration and re-instate the circuit. The repeated cooling / heating gives the required on-off indicator action.

In the present invention the thermal activator is preferably used to move a plug between a position in which at least one of the inlet and / or outlet apertures is

closed (i.e. the plug is within / adjacent to the aperture) to a position in which at least one of the inlet and / or outlet apertures is open (i.e. the plug is distanced from the aperture). Most preferably a thermal bimetal is used to control the operation of a plug in conjunction with the outlet aperture.

It is recognised that thermal bimetals are divided into conventional thermal bimetals and thermal bimetal snap elements. In the present invention the thermal actuator may comprise a conventional thermal bimetal and / or a thermal bimetal snap element.

Thermal bimetal snap elements have multiple "snap" temperatures, with the snap temperature referring to the temperature at which the thermal bimetal undergoes a significant change in configuration. There is a higher snap temperature (at which the thermal bimetal snap element distorts from its original configuration into a second configuration) and a lower snap temperature (at which the thermal bimetal snap element distorts back to its original configuration).

The upper and lower snap temperatures are not equal to one another but are separated. This has the effect that there is a temperature zone at which the thermal bimetal snap element may be at its high temperature configuration even though the temperature of the thermal bimetal snap element is lower than that of the higher snap temperature: the thermal bimetal snap element does not revert to its low temperature configuration until the lower snap temperature is reached.

This effect is referred to as hysteresis and is described more fully in the journal "Feinwerktechnik, Microtechnik & Messtechnik", 103. Jahrgang 9/95. The effect is also illustrated more clearly with reference to Figure 1 and to the following example.

Figure 1 is a graph showing orientation of the thermal bimetal snap element (here with reference to distortion distance from a pre-set point (y-axis)) versus temperature (x-axis).

It can be seen that as the temperature increases the thermal bimetal snap element distorts in a linear fashion until the higher snap temperature (T_0) is reached. At this point the distortion of the thermal bimetal snap element jumps to the high temperature configuration. With further increasing temperature the thermal bimetal snap element again distorts in a linear fashion.

As the temperature of the thermal bimetal snap element is decreased (starting from above the higher snap temperature) the reverse occurs. The thermal bimetal snap element distorts in a linear fashion until the lower snap temperature (T_u) is reached. At this point the thermal bimetal snap element jumps to the low temperature configuration. With further decreasing temperatures the thermal bimetal snap element again distorts in a linear fashion.

Thus a hysteresis effect is observed between T_0 and T_u .

Preferably the thermal bimetal snap element used in the present invention is selected so as to have a lower and a higher snap temperature which is suited to the operation of the device in an automatic dishwashing machine.

In a first embodiment, where a single thermal bimetal snap element is used to move the plug, the thermal bimetal snap element preferably has a higher snap temperature of between 35 to 45°C, more preferably between 38 to 42°C and most preferably about 40°C. The thermal bimetal snap element preferably has a lower snap temperature of about 20 to 30°C, more preferably between 23 to 27°C and most preferably about 25°C. Most preferably the difference between the snap temperatures is about 15°C.

This is made more clear with reference to Figure 2 which shows a typical temperature / time profile of an automatic dishwashing machine.

Figure 2 is a graph showing the temperature of the inside of a typical dishwasher machine (y-axis) versus time (x-axis). Labels which identify portions of the wash cycle (wash cycles and rinse cycles) are also shown.

It can be seen that the dishwasher temperature starts from a low starting point of 15°C to 25°C. In operation as the main wash cycle is carried out the temperature increases to a maximum plateau of about 50°C to 75°C (defined by the chosen wash program). There are commonly one or more additional intermediate wash cycles at lower temperature, before the temperature decreases back down to around 30°C to 35°C in between the wash and the rinse cycle. As the

rinse cycles are carried out the temperature inside the machine increases to a maximum plateau of about 70°C before dropping down to around 20°C.

A thermal bimetal snap element which displays the preferred higher and lower snap temperature described above may be used to close at least one of the inlet and / or outlet apertures as the temperature reaches 45°C yet will not re-open the aperture until the temperature drops to 25°C.

Hence dishwasher liquor may become loaded with detergent until a temperature of 45°C is reached. This allows sufficient detergent to enter the dishwasher wash liquor to meet the washing requirements during the wash cycles.

Above 45°C at least one of the inlet and / or outlet apertures of the device is closed such that no more detergent is loaded into the wash liquor. Even though the temperature of the machine drops between the wash cycle and the rinse cycle the temperature does not drop to the lower snap temperature, with the effect that the closed aperture does not re-open until the dishwasher cycle is finished and the machine is allowed to cool back to ambient temperature. Therefore the rinse cycles operate efficiently and perform effectively rinsing of the dishwasher contents without being hindered by further detergent addition.

The thermal bimetal snap element may be in the form of a strip. In this case generally a first portion of the strip is attached to / liases with the device (such as with a portion of the body) and a second potion of the strip is attached to / liases with the plug. Distortion of the

strip causes movement of the plug relative to the device / aperture causing the opening / closing of the aperture.

The thermal bimetal snap element may be in the form of a 2-dimensional shape (such as a square or circle / disc). Hereby, it is understood that in at least one of the configurations of the thermal bimetal snap element (i.e. above and / or below the lower / upper snap temperatures) the thermal bimetal snap element may actually comprise a 3-dimensional shape (such as a dome / cone). Indeed the seemingly 2-dimensional shape may in reality comprise a 3-dimensional form in both high and low temperature configurations with alteration of temperature causing the 3-dimensional shape to become inverted.

In this case the thermal bimetal snap element need not be rigidly attached to a portion of the device but instead retained therein such that a periphery of the thermal bimetal snap element may interact with the plug and the device, as the thermal bimetal snap element alters its 3-dimensional state, moving the plug relative to the device / aperture.

As an example the device may include a plate on which the strip is mounted adjacent to the plug. The mounting means may include a rod extending from the plug which intersects the thermal bimetal snap element by a suitable aperture. Said rod may have a terminal flange to retain the thermal bimetal snap element thereon / interact with the thermal bimetal snap element. Activation of the thermal bimetal snap element, by crossing the higher / lower snap temperature causes the thermal bimetal snap element to form.

a 3-dimensional shape / invert the pre-existing 3-dimensional shape. This causes interaction of the thermal bimetal snap element with the plug / flange altering the position of the plug.

Optionally the rod comprises a frame mounted thereon between the portion of the rod which intersects the thermal bimetal snap element and the plug.

In an alternative arrangement the alteration of the shape of the thermal bimetals may in itself control the opening of at least one of the inlet and / or outlet aperture.

In this regard the thermal bimetal snap element may be mounted within the device such that it creates a plug around at least one of the inlet and / or outlet aperture at its high temperature configuration. Namely the periphery of the thermal bimetal snap element may engage the area adjacent to the aperture in the high temperature configuration, forming a three-dimensional structure thereupon, thus blocking at least one aperture.

In contrast to thermal bimetal snap elements conventional thermal bimetals do not display a hysteresis effect. Instead conventional thermal bimetals display a largely linear distortion over a specified temperature range.

In the present invention the thermal actuator may comprise a conventional thermal bimetal which may be used to move a plug into engagement with at least one of the inlet and / or outlet apertures. Alternatively the conventional

thermal bimetal may engage the aperture itself providing a closing effect.

Where the conventional thermal bimetal moves a plug into engagement with at least one of the inlet and / or outlet apertures it is preferably arranged within the device so that a portion of the conventional thermal bimetal engages a portion of the body of the device and a portion of the conventional thermal bimetal engages a portion of the plug.

The conventional thermal bimetal may comprise a spiral shape. Such a shape is recognised to exaggerate the effect of temperature upon the amount of displacement of the conventional thermal bimetal.

In order to attempt to provide a hysteresis effect using a conventional thermal bimetal the plug may have a plurality of engagement points for the conventional thermal bimetal. Preferably the points are distanced from one another.

As an example the plug may comprise a linear incision, the termini of which are used to engage a portion of a conventional thermal bimetal. The space between the termini provides a delay during which movement of the conventional thermal bimetal with changing temperature does not move the plug.

In a second embodiment a plurality of thermal actuators may be used to move the plug / control the opening of at least one of the inlet / outlet apertures.

Preferably the plurality of thermal actuators comprise thermal bimetals.

In this embodiment the device preferably comprises a primary thermal bimetal which interacts with the plug and a secondary thermal bimetal which has an effect on the operation of the primary thermal bimetal / opening of at least one of the inlet / outlet apertures.

The primary thermal bimetal preferably comprises a conventional thermal bimetal strip which has an activation temperature of about 35°C. Thus at temperatures of above 35°C the plug may be opened to allow wash liquor to contact the detergent.

The secondary thermal bimetal preferably comprises a thermal bimetal snap element having a lower and a higher snap temperature as outlined above.

The secondary thermal bimetal may be used to block the activity of the primary thermal bimetal. This may be achieved by physical contact between the primary and secondary thermal bimetals or by physical contact between the plug and the secondary thermal bimetal. Alternatively the secondary thermal bimetal may liase with a secondary plug which is used to block at least one of the inlet / outlet apertures.

For the first option the primary thermal bimetal opens at least one of the inlet / outlet apertures at about 35°C, thus allowing liquor to enter and flow through the device, releasing detergent into the wash liquor in the machine.

Ordinarily the primary thermal bimetal would close the aperture as the temperature drops below 35°C near the end of the wash cycle. Additionally with no thermal bimetal present the primary thermal bimetal would re-open the aperture as the temperature of the dishwasher machine climbed again during the rinse cycle, thus causing detrimental release of dishwasher detergent.

The presence of the secondary thermal bimetal prevents the re-opening of the aperture during the rinse cycle. This is achieved by the secondary thermal bimetal providing a one-way blocking function. Namely the secondary thermal bimetal is arranged in the device such that in its high temperature configuration it forms a block to the movement of the primary thermal bimetal / plug. Most particularly secondary thermal bimetal preferably only acts as a block on the activation of the primary thermal bimetal with increasing temperature (especially as the temperature increases for the second time in the dishwasher cycle) but allows the activation associated with decreasing temperature to occur.

Thus as the temperature in the wash cycle changes during the wash cycle the following events occur:

- a) As the temperature increases above 35°C the primary thermal bimetal is activated opening the aperture.
 - b) As the temperature increases above 40°C the secondary thermal bimetal is activated blocking the movement of the primary thermal bimetal / plug.
-

c) As the temperature decreases below 35°C the primary thermal bimetal is activated closing the aperture. The closing occurs as the secondary thermal bimetal does not provide a blocking function for closing of the aperture.

d) As the temperature increases for the second time above 35°C the primary thermal bimetal is activated. However, activation of the primary thermal bimetal is prevented by the presence of the secondary thermal bimetal in the activation pathway of the primary thermal bimetal / plug.

e) As the temperature decreases below 25°C the secondary thermal bimetal is activated returning to its low temperature configuration. Thus the primary thermal bimetal may be activated for the next wash cycle.

For the second option the primary thermal bimetal opens at least one of the inlet / outlet apertures at about 35°C, thus allowing liquor to enter and flow through the device, releasing detergent into the machine.

Ordinarily the primary thermal bimetal would close the aperture as the temperature drops below 35°C near the end of the wash cycle and re-open the aperture during the rinse cycle (as described above).

The presence of the secondary thermal bimetal prevents the re-opening of the aperture during the rinse cycle. This is achieved by the secondary thermal bimetal blocking the aperture with a second plug. Namely the secondary thermal bimetal is arranged in the device such that in its high

temperature configuration it moves a second plug into engagement with the aperture.

Thus, as the temperature in the wash cycle changes during the wash cycle the following events occur:

- a) As the temperature increases above 35°C the primary thermal bimetal is activated opening the aperture.
 - b) As the temperature increases above 40°C the secondary thermal bimetal is activated moving the second plug into engagement with the aperture.
 - c) As the temperature decreases below 35°C the primary thermal bimetal is activated closing the aperture. However, the primary plug is only forced into contact with the secondary plug.
 - d) As the temperature increases for the second time above 35°C the primary thermal bimetal is activated. However, activation of the primary thermal bimetal only serves to move the primary plug away from contact with the secondary plug.
 - e) As the temperature decreases below 35°C for the second time the primary thermal bimetal is activated closing the aperture. However, the primary plug is only forced into contact with the secondary plug.
 - f) As the temperature decreases below 25°C the secondary thermal bimetal is activated returning to its low temperature configuration. Thus the primary thermal
-

bimetal may close the aperture by bringing the primary plug into engagement therewith.

The thermal actuator may comprise a shape memory alloy or a wax actuator. Both of these elements are recognised to undergo temperature induced deformation and so may be used to control the opening of at least one of the inlet and / or outlet apertures by movement of a plug or by engagement thereof.

A further condition which changes significantly during a dishwasher wash cycle is water availability / humidity inside the machine. Thus, optionally the component reacts to a change in the availability of water / humidity inside the dishwasher.

Preferably the component swells/expands upon contact with water. Most preferably the component is mounted within the device adjacent to one or both of the inlet and / or outlet apertures. Thus when the component is exposed to water it swells/expands causing the closing of one or both of the inlet and / or outlet apertures at or before the start of the rinse cycle.

Preferably the component does not recover its original size until at least the end of the rinse cycle (the recovery may be triggered by the drying cycle). In this way detergent is only released into the machine for a limited time period, meeting the requirements of the wash cycle without hindering the performance of the rinse cycle.

Materials which are suitable in this regard include high molecular weight cross-linked acrylic acid polymers.

The inlet aperture may have a collecting funnel associated therewith which collects wash liquor and directs it towards the inlet aperture. Most preferably the collecting funnel and inlet aperture are arranged so that the only way in which wash liquor can enter the inlet aperture is via the collecting funnel. This may be achieved by having the dispensing portion of the collecting funnel abutting against the internal periphery of the inlet aperture.

Preferably the collecting funnel has a drainage opening in its collecting portion. When present the drainage opening ensures that the level of wash liquor in the collecting portion of the funnel does not exceed a certain predetermined level. If it is assumed that the collecting funnel is filled up to the drainage aperture for the duration of the wash and / or rinse cycles then the amount of wash liquor discharge from the collecting funnel into the channel will be largely constant per wash cycle.

The body is most preferably formed of a water-resistant material. Most preferably the body comprises a water insoluble material. Preferred materials for the body include glass, ceramic, metal and plastics materials such as an alkene polymer, e.g. polypropylene. Plastics materials are most preferred due to their resilience and low cost (material and manufacturing costs).

Generally the body of the device comprises a channel which is in communication with the inlet aperture. Preferably

the channel has a bar of detergent disposed therein, wherein the detergent bar completely fills at least a portion of the channel across the entire bore of the channel.

In this arrangement it has been found that the device is able to provide a uniform / equal amount of detergent in each dishwasher cycle for an individual dishwasher using the same washing program in consecutive wash cycles.

Without wishing to be bound by theory it is postulated that the uniform / predictable release property arises due to the arrangement of the detergent bar within the channel. With such an arrangement a portion of the detergent bar contacts the channel and is thus protected by the channel, i.e. is not exposed to the wash liquor even when both the inlet and outlet apertures are open. A second portion of the detergent bar, which extends across the bore of the channel, is exposed to the wash liquor. The surface area of this second exposed portion is determined by the bore of the channel.

In use in a washing machine the detergent is dispensed and thus the portion of the detergent exposed to the wash liquor "retreats" along the channel. Thus most preferably the channel has a uniform bore, in terms of the cross sectional area of the bore, along its length / at least along the portion filled by the detergent bar. This allows the surface area of the exposed portion of the detergent bar to remain constant as the exposed portion of the bar retreats along the channel. In this way any problems of decreasing / altering surface area, such as would be

experienced with a simple 3-dimensional block, the surface area of which decreases as the block is dispersed, are overcome.

Generally the channel is a tube. Most preferably the tube is cylindrical, although any cross-sectional shape is possible (e.g. regular / irregular polygon such as a triangle, square, rectangle, pentagon, hexagon). The tube may include a smaller tube disposed along a portion of its length. Such a tube may provide additional structural integrity for the detergent bar. Where a second tube is present it is preferred that the second tube has a uniform cross section along its length / the length of the detergent bar, thus the surface area of the detergent bar exposed to the wash liquor is constant as the detergent bar retreats along the channel.

Typically the channel is completely filled along a portion of its length across the entire cross-section thereof by the detergent bar. Thus a portion of the detergent bar is in contact with the interior of the channel and is thus protected by the channel, i.e. not exposed to wash liquor. A second portion of the detergent bar, which extends across the bore of the channel, is exposed to the wash liquor.

Most preferably the exposed portion of the detergent bar comprises a planar surface. Generally the planar surface is perpendicular to the periphery of the channel.

Most preferably the channel only has one open end which communicates with the inlet aperture to allow wash liquor

to contact the detergent bar. Thus the body may comprise a form similar to a drinking glass.

In an alternative arrangement the channel may comprise a tube with both ends open to wash liquor (via an inlet aperture) with the detergent bar disposed at a central portion of the tube.

The detergent bar most preferably comprises an automatic dishwasher detergent. Preferred examples of which include conventional detergents, and the "2-in-1" and "3-in-1" variants. Most preferably the detergent bar comprises a solid so that the rigours of the movement of the washing machine liquor will not cause the entire detergent bar to be dispensed / discharged in the first washing cycle. In the context of the present invention the term solid can be taken to include solidified gels as well as conventional solid materials (such as compressed particulate materials and solidified molten / cross-linked materials).

The detergent bar contains sufficient detergent for a plurality of dishwasher wash cycles. Preferably the detergent bar contains sufficient detergent for between 3 to 20 dishwasher wash cycles, more preferably from 5 to 12 dishwasher wash cycles.

The detergent formulation typically comprises one or more of the following components; builder, co-builder, surfactant, bleach, bleach activator, bleach catalyst, enzyme, polymer, dye, pigment, fragrance, water and organic solvent.

Optionally the detergent bar comprises a detergent additive. It will be appreciated that a detergent additive, when compared to a detergent, may be required during a different section of the dishwasher wash cycle (e.g. such as the rinse cycle for a rinse aid detergent additive). Thus in accordance with a second aspect of the present invention there is provided a portable automatic dishwasher detergent additive dispensing device comprising a body enclosing a detergent additive, sufficient for a plurality of wash cycles, the body having an inlet aperture to allow wash liquor to contact the detergent and an outlet aperture to allow the detergent loaded wash liquor to exit the body and means to open one or both of the apertures at or after the start of the dishwasher rinse cycle.

The device according to the invention offers great the same ease for the consumer as the device in accordance with the first aspect of the invention. However, in this case it allows the release of a detergent additive over a plurality of wash cycles where the detergent additive is required for the rinse cycle rather than the main wash cycle. Thus the device is able to release an appropriate amount of detergent additive in each dishwasher rinse cycle so that effective rinsing can be performed without there being any detrimental effect on the washing operation of the automatic dishwasher.

Preferred detergent additives include rinse aids, anti-spotting compositions (e.g. such as that sold under the trade name of Jet-Dry) and also glass corrosion prevention compositions such as those containing zinc (in the form of a glass, glass granulate, or other soluble form).

In the case of zinc the delay of the release until the rinse cycle can give beneficial washing effects as zinc is recognised to detrimentally effect bleaching in the wash cycle causing poor stain (especially tea stain) removal.

It will be understood that the features of the first aspect of the invention shall apply *mutatis mutandis* to the second aspect of the invention. Clearly the emphasis / distinction of release in the rinse cycle rather than the wash cycle will be made.

According to a third aspect of the present invention there is provided the use of an automatic washing machine detergent dispensing device in accordance with the first or second aspect of the invention.

Most preferably the device is used where the device can easily be accessed and nicely visible. The front part of the upper rack is preferred.

The invention is now further described with reference to the following Figures in which: -

Figures 3(a), 3(b) and 3(c) are side cross-sectional views of a first embodiment of a detergent dispensing device in accordance with the present invention;

Figures 4(a), 4(b) and 4(c) are side cross-sectional views of a second embodiment of a detergent dispensing device in accordance with the present invention;

Figure 5 shows a temperature / time profile of a dishwasher cycle; and

Figure 6 is a side cross-sectional view of a third embodiment of a detergent dispensing device in accordance with the present invention.

Figure 3a shows a detergent dispensing device 1. The device 1 comprises a detergent bar 2 which is disposed within a body 3. The body 3, as illustrated, is based on a sphere with a plate section 4.

The body 3 has a wash liquor inlet 5, which allows the wash liquor to contact the detergent bar 2 and thus become loaded with detergent. The body 3 has a wash liquor outlet 6 which allows the detergent loaded wash liquor to exit from the body 3. The wash liquor inlet 5 and wash liquor outlet 6 are formed in the plate 4 of the body 3.

The body 3 has a dispensing control means which controls the opening of the inlet 5 and outlet 6 apertures. This means is mounted on the plate 4. The means comprises two plugs 7a, 7b which liase / engage with the inlet aperture 5 and the outlet aperture 6 respectively. As shown the plugs 7a,7b comprise cylindrical rods, although it will be appreciated that one or both plugs 7a,7b may have alternate forms to co-operate with their respective aperture 5,6.

The plate 4 has a central aperture 8. The central aperture 8 is equally distanced between the inlet aperture 5 and the outlet aperture 6.

The dispensing control means further comprises a rod 9, which can move upwards and downwards in the central aperture 8 relative to the plate 4. The rod 8 has an upper terminal flange 10 and a lower terminal flange 11.

The upper terminal flange 10 is circular and has a diameter which is slightly larger than the central aperture 8 to prevent the rod 9 from dropping there through.

The lower terminal flange 11 is also circular and has a radius such that the flange 11 extends as far as the outlet aperture 6 and the inlet aperture 5. The lower terminal flange 11 provides support for the plugs 7a, 7b.

Disposed around the rod 9 between the plate 4 and the upper flange 10 is a circular thermal bimetal snap element 12. The thermal bimetal snap element 12, in reaction to changing temperature, controls the position of the dispensing controls means. This is explained below and is more clearly illustrated with additional reference to Figures 3b and 3c.

Figure 3a illustrates the dispensing control means at a temperature below the upper snap temperature (40°C) of the thermal bimetal snap element 12. Below this temperature the thermal bimetal snap element 12 comprises a truncated dome orientated such that the tip of the dome abuts against the plate 4 and the periphery of the dome extends away from the plate 4. Thus the upper flange 10 is proximal to the plate 4; this means that the inlet aperture 5 and outlet aperture 6 are both open.

Figure 3b illustrates the dispensing control means at a temperature above the upper snap temperature (40°C) of the thermal bimetal snap element 12. Above this temperature the thermal bimetal snap element 12 comprises a truncated dome orientated such that the tip of the dome abuts against the upper flange 10 and the periphery of the dome abuts against the plate 4. In this orientation the upper flange 10 is distanced from the plate 4, additionally the lower flange 11 and plugs 7a, 7b are brought towards the plate 4 with the effect that the plugs 7a, 7b engage the inlet aperture 5 and the outlet aperture 6 respectively. Thus the inlet 5 and outlet 6 apertures are closed.

Figure 3c illustrates the dispensing control means at a temperature below the lower snap temperature (25°C) of the thermal bimetal snap element 12 (this orientation is the same as that shown in Figure 3a).

To bring the operation of the thermal bimetal snap element 12 and its snap temperatures in to context reference is made to Figure 5. Figure 5 shows the typical temperature/time profile of a dishwasher cycle.

Figure 5 also includes marking for the lower 13 (25°C) and upper snap point 14 (40°C) of the thermal bimetal snap element 12. Thus it can be seen that the dishwasher liquor may become loaded with detergent until a temperature of 40°C is reached, this allows sufficient detergent to enter the dishwasher wash liquor to meet the washing requirements during the wash cycles. Above 40°C at least one of the inlet 5 and / or outlet 6 apertures of the device 1 is

closed such that no more detergent is loaded into the wash liquor. This allows the rinse cycles to operate effectively and perform effectively rinsing of the dishwasher contents as although the temperature of the machine drops in between the wash and the rinse cycle it does not drop to the lower snap temperature, thus the closed aperture does not re-open until the rinse cycle is finished.

Figures 4(a) to 4(c) show an alternative embodiment of the device of Figures 3(a) to 3(c). In these Figures the principle of operation of the device is identical. The distinction is that the thermal bimetal snap element 12 itself provides a closing action for the inlet aperture 5 and the outlet aperture 6 as the temperature increases above the upper snap temperature.

This is achieved by the thermal bimetal snap element 12 being mounted on the rod 9 with the rod 9 being fixedly attached within the aperture 8. Thus a change in the configuration of the thermal bimetal snap element 12 does not have an effect on the position of the rod 9. Instead the change in configuration only affects the position of the thermal bimetal snap element 12 itself. In this case above the higher snap temperature the periphery of the truncated cone is brought into contact with the plate 4, thus sealing both the inlet aperture 5 and the outlet aperture 6.

Figure 6 shows an alternative embodiment of the device which has a water swellable 15 member to control the flow of water into the inlet aperture 5.

The water swellable member 15 is mounted adjacent to the inlet aperture 5. In use in the dishwashing machine the water swellable member 15 swells, caused by contact with water in the wash liquor. The swelling of the swellable member 15 causes the inlet aperture 5 to be blocked thus preventing wash liquor from entering the device 1 and contacting the detergent bar 2.

Also in Figure 6 the detergent dispensing device shown in Figure 1 has a means to control the amount of wash liquor which contacts the detergent bar. Said means comprises a funnel 16 having a collecting portion 17 and a directing portion 18.

Now for wash liquor to come into contact with the detergent bar 2, the wash liquor has to pass through the funnel 16.

In the preferred orientation of the device 1 wash liquor collects in the collecting portion 17 of the funnel 16 and passes into contact with the detergent bar 2 via the directing portion 18. Most preferably the collecting portion 17 has an opening 19 along a portion of its length. The presence of opening 19 in the collecting portion 17 means that wash liquor may only collect in the collecting portion 17 up to the height of the opening 19, before being directed into contact with the detergent bar 2. Excess wash liquor is discharged away from the device 1 down the side thereof.

By exercising control over the amount of wash liquor directed into contact with the detergent bar 2, or more specifically by limiting the amount of water which is

allowed to contact the detergent bar 2, the amount of detergent dispensed in wash cycle can be limited.

Each embodiment of the device does not suffer from the disadvantages associated with multi-dose detergent devices of the prior art as its simplicity enables the device to have a small volume, allowing ease of placement within the dishwashing machine. Also as the device does not rely on any complex construction / complex operating mechanism the device may be produced at low cost.

It will be appreciated that the invention is not intended to be overly limited by reference to the Figures 3 to 6.

CLAIMS

1. A portable automatic dishwasher detergent dispensing device comprising a body enclosing a detergent or detergent additive, sufficient for a plurality of wash cycles, the body having an inlet aperture to allow wash liquor to contact the detergent and an outlet aperture to allow the detergent loaded wash liquor to exit the body and means to close the one or both of the apertures at or before the start of the dishwasher rinse cycle.
 2. A device according to claim 1, wherein the closing means reacts to a change in the conditions of the dishwasher during the dishwasher washing cycle.
 3. A device according to claim 2, wherein the closing means reacts to a change in temperature during the dishwasher washing cycle.
 4. A device according to claim 3, wherein the closing means comprises a thermal activator such as a thermal bimetal (including conventional thermal bimetals and thermal bimetal snap elements), a wax activator or a shape memory alloy.
 5. A device according to claim 4, wherein the thermal bimetal snap element moves a plug between a position in which at least one of the inlet and / or outlet apertures is closed to a position in which at least one of the inlet and / or outlet apertures is open.
-

6. A device according to claim 5, wherein the thermal bimetal snap element has a higher snap temperature of between 30 to 50°C, more preferably between 35 to 45°C and most preferably about 40°C.
7. A device according to claim 5 or 6, wherein the thermal bimetal snap element has a lower snap temperature of about 20 to 35°C, more preferably between 23 to 27°C and most preferably about 25°C.
8. A device according to claim 4, 5, 6 or 7, wherein the thermal bimetal snap element is in the form of a strip.
9. A device according to claim 8, wherein a first portion of the thermal bimetal snap element is attached to / liases with the device and a second portion of the thermal bimetal snap element is attached to / liases with the plug.
10. A device according to claim 4, 5, 6 or 7, wherein the thermal bimetal snap element is in the form of a two dimensional shape.
11. A device according to claim 10, wherein the thermal bimetal snap element is retained in the device such that one or more of the peripheries of the thermal bimetal snap element interacts with the plug and the device, moving the plug relative to the device.
12. A device according to claim 11, wherein the thermal bimetal snap element is mounted on a plate in the device.

13. A device according to claim 12, wherein the mounting means includes a rod extending from the plug which intersects the thermal bimetal snap element.

14. A device according to claim 13, wherein the rod has a terminal flange to retain the thermal bimetal snap element / interact therewith.

15. A device according to claim 1, 2, 3 or 4, wherein the closing means comprises a plurality of thermal bimetals.

16. A device according to claim 15, wherein the device comprises a primary thermal bimetal which affects the interaction of a plug with the inlet / outlet aperture and a secondary thermal bimetal which affects the operation of the primary thermal bimetal.

17. A device according to claim 16, wherein the primary thermal bimetal is a conventional thermal bimetal having an activation temperature of about 40°C.

18. A device according to claim 16 or 17, wherein the secondary thermal bimetal comprises a thermal bimetallic snap element having a higher snap temperature of about 40°C and a lower snap temperature of about 25°C.

19. A device according to claim 1 or 2, wherein the closing means reacts to the presence of water / humidity in the dishwasher.

20. A device according to claim 19, wherein the closing means swells upon contact with water causing the closing of one or both of the inlet and / or outlet apertures.
21. A device in accordance with any one of claims 1 to 20, wherein the device comprises a second means to control the amount of wash liquor which enters the inlet aperture.
22. A device in accordance with claim 21, wherein the means comprises a collecting funnel.
23. A device in accordance with claim 22, wherein the collecting funnel has a drainage opening in its collecting portion.
24. A device in accordance with any one of claims 1 to 23, wherein the body comprises a water-resistant / water insoluble material.
25. A device in accordance with claims 24, wherein the body comprises a channel which is in communication with the inlet aperture.
26. A device in accordance with claim 25, wherein the channel has a bar of detergent disposed therein with the detergent bar completely filling at least a portion of the channel across the entire bore thereof.
27. A device in accordance with claim 26, wherein the channel has a uniform bore, in terms of the cross sectional area of the bore, along its length / at least along the portion filled by the detergent bar.

28. A device in accordance with claim 27, wherein the channel is a tube.

29. A portable automatic dishwasher detergent additive dispensing device comprising a body enclosing a detergent additive, sufficient for a plurality of wash cycles, the body having an inlet aperture to allow wash liquor to contact the detergent and an outlet aperture to allow the detergent loaded wash liquor to exit the body and means to open one or both of the apertures at or after the start of the dishwasher rinse cycle.

30. A device in accordance with claim 29, wherein the detergent additive is a anti-spotting composition or a glass corrosion prevention composition.


31. The use of an automatic washing machine detergent dispensing device in accordance with any one of claims 1 to 30.

32. An automatic washing machine detergent dispensing device as illustrated in accompanying Figures 3 , 4 and 6.

ABSTRACT**Automatic Washing Machine Detergent Dispensing Device**

A portable automatic dishwasher detergent dispensing device comprises a body enclosing a detergent. The amount of detergent is sufficient for a plurality of wash cycles. The body has an inlet aperture to allow wash liquor to contact the detergent and an outlet aperture to allow the detergent loaded wash liquor to exit the body. The device has means to close the one or both of the apertures at or before the start of the dishwasher rinse cycle.

Fig. 1

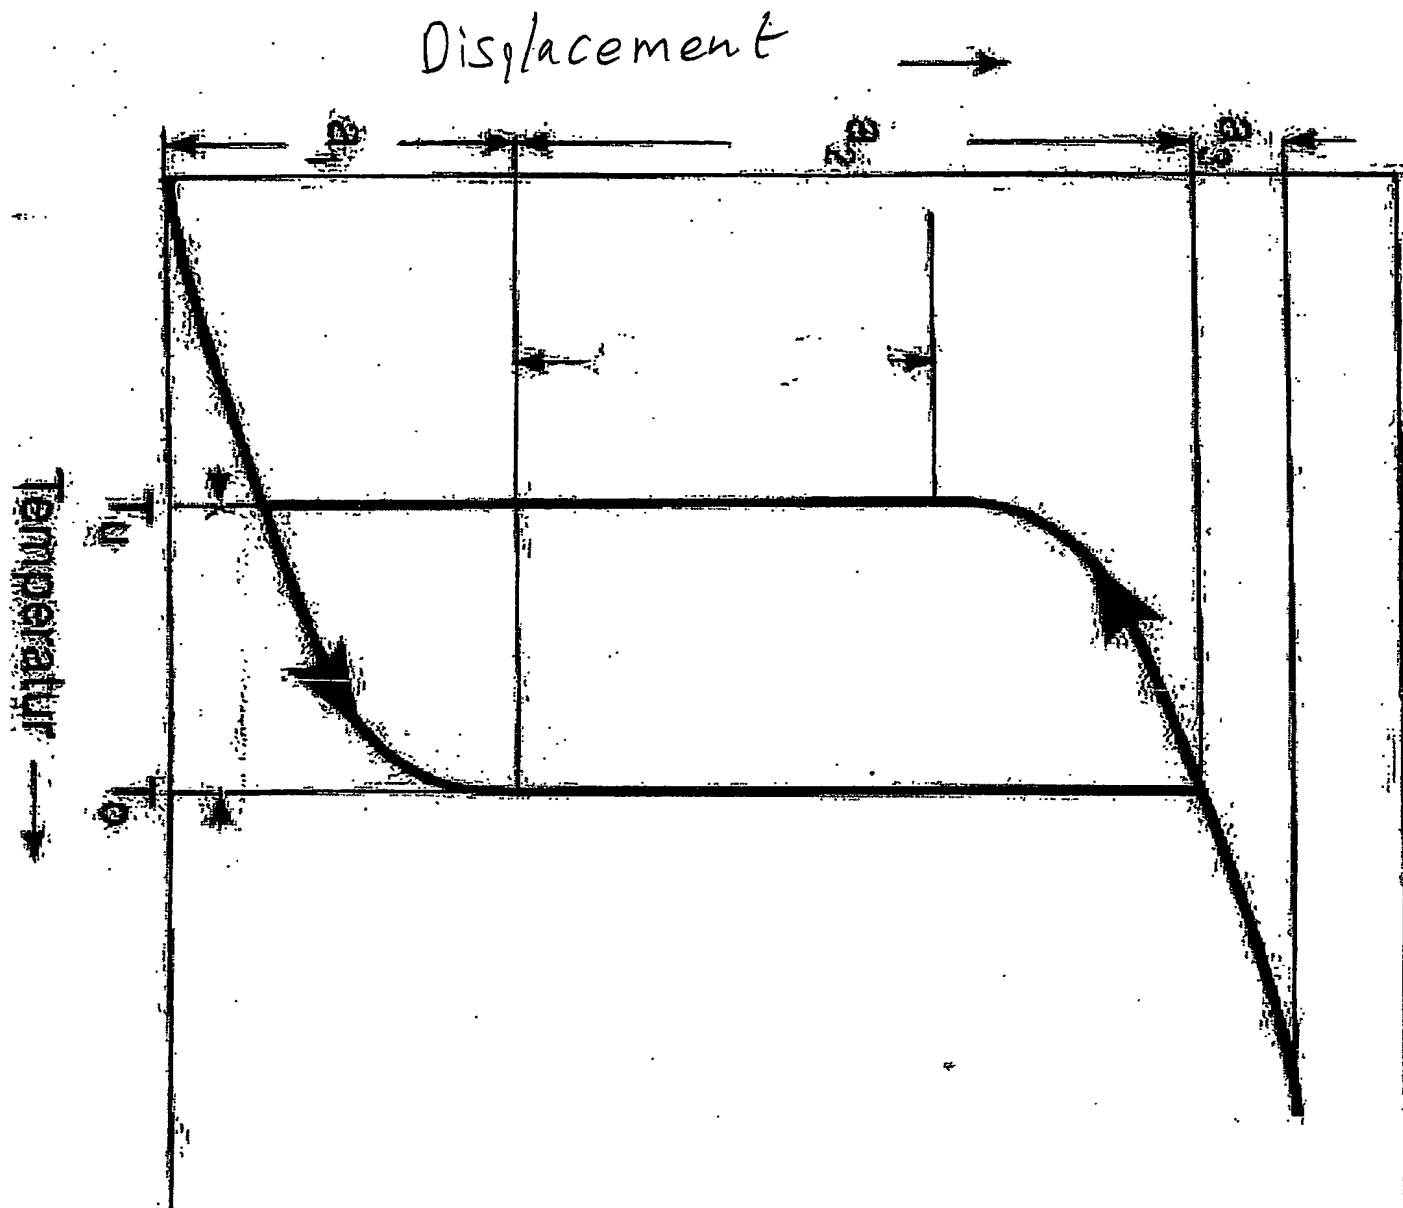

NOT TO BE AMENDED

Temperature

70°

50-75°

15-25°

Wash
Cycles

Rinse
Cycles


Time

Fig 2

NOT TO BE AMENDED

11


12

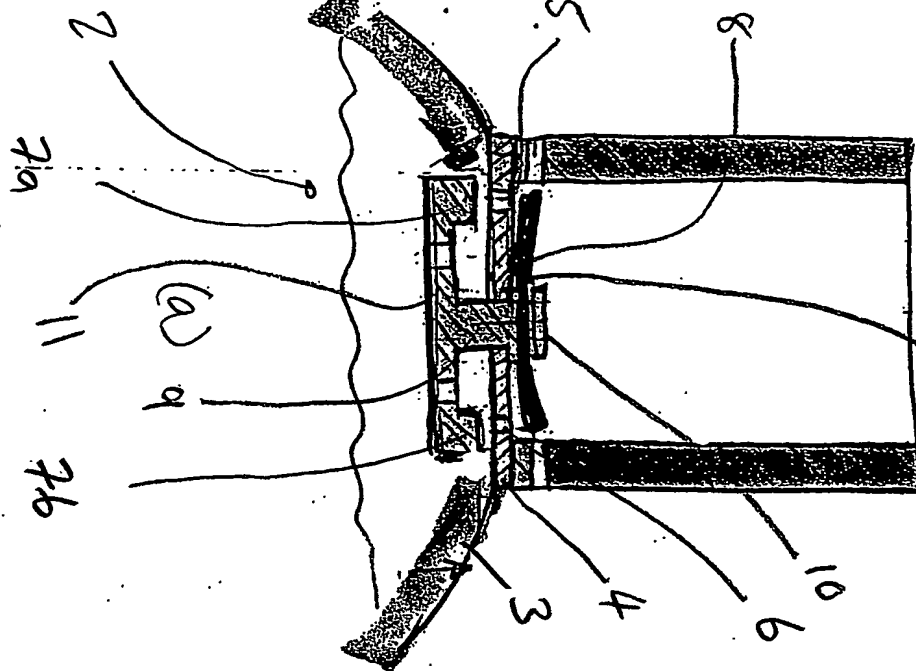

(a)

7a

(b)

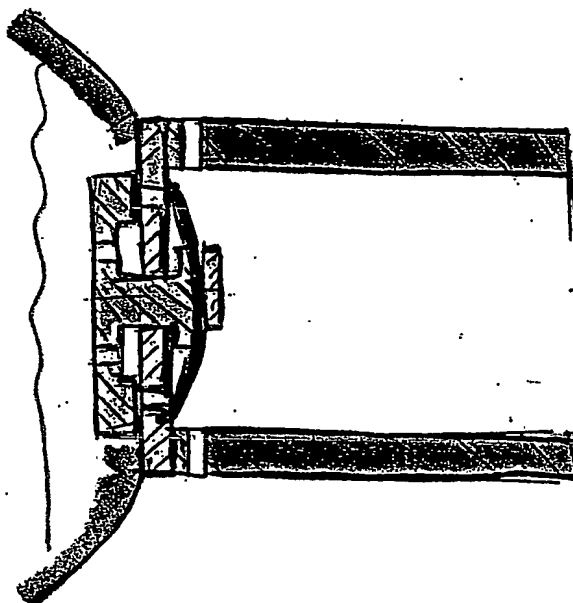

(c)




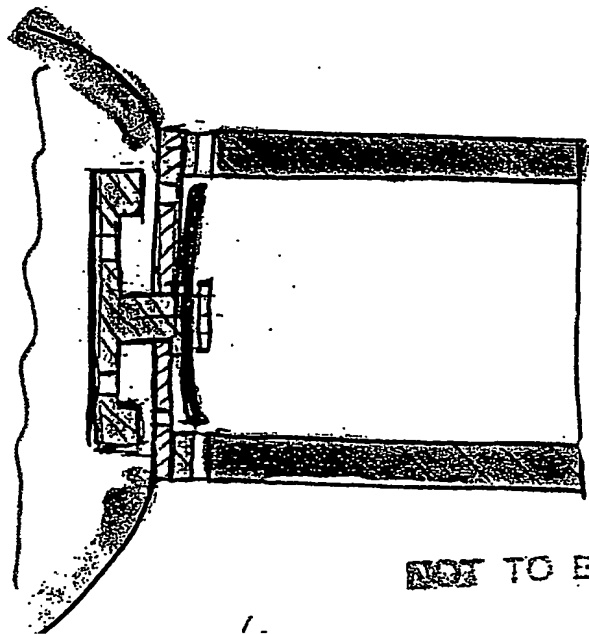


Fig 3

NOT TO BE AMENDED

Fig 4

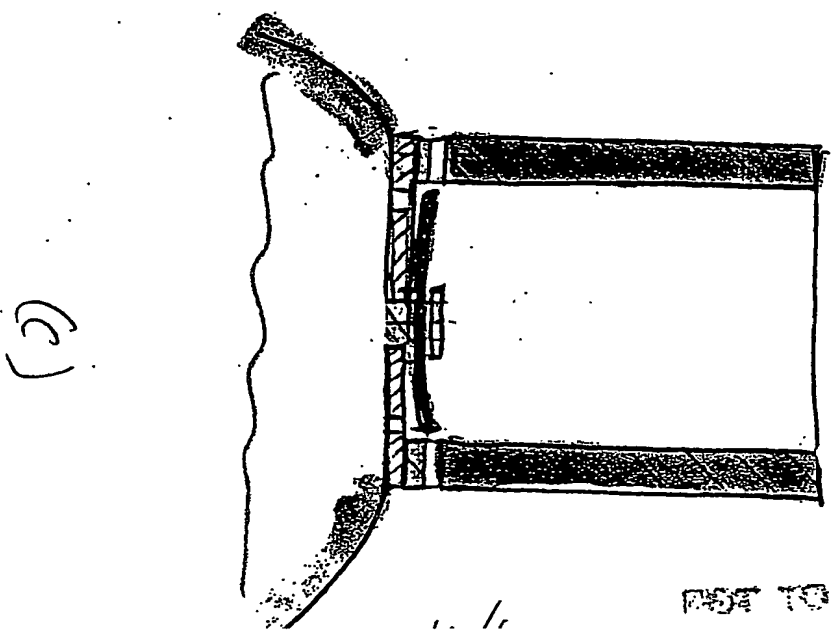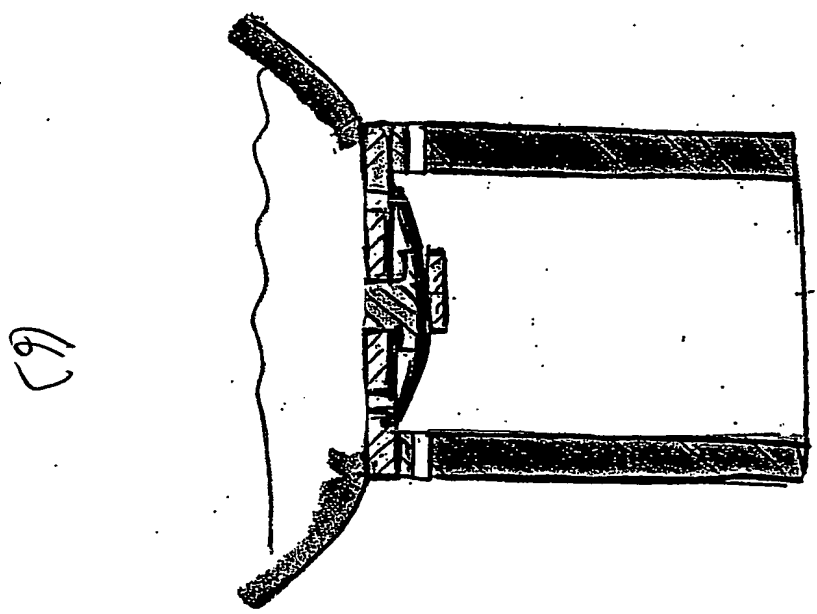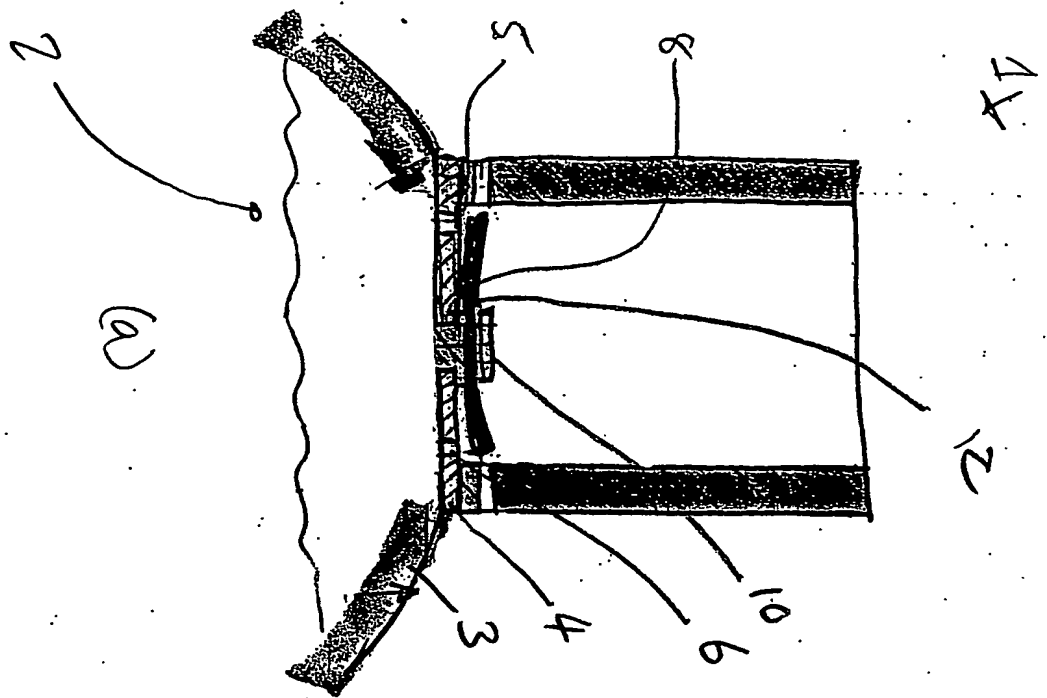

Temperature


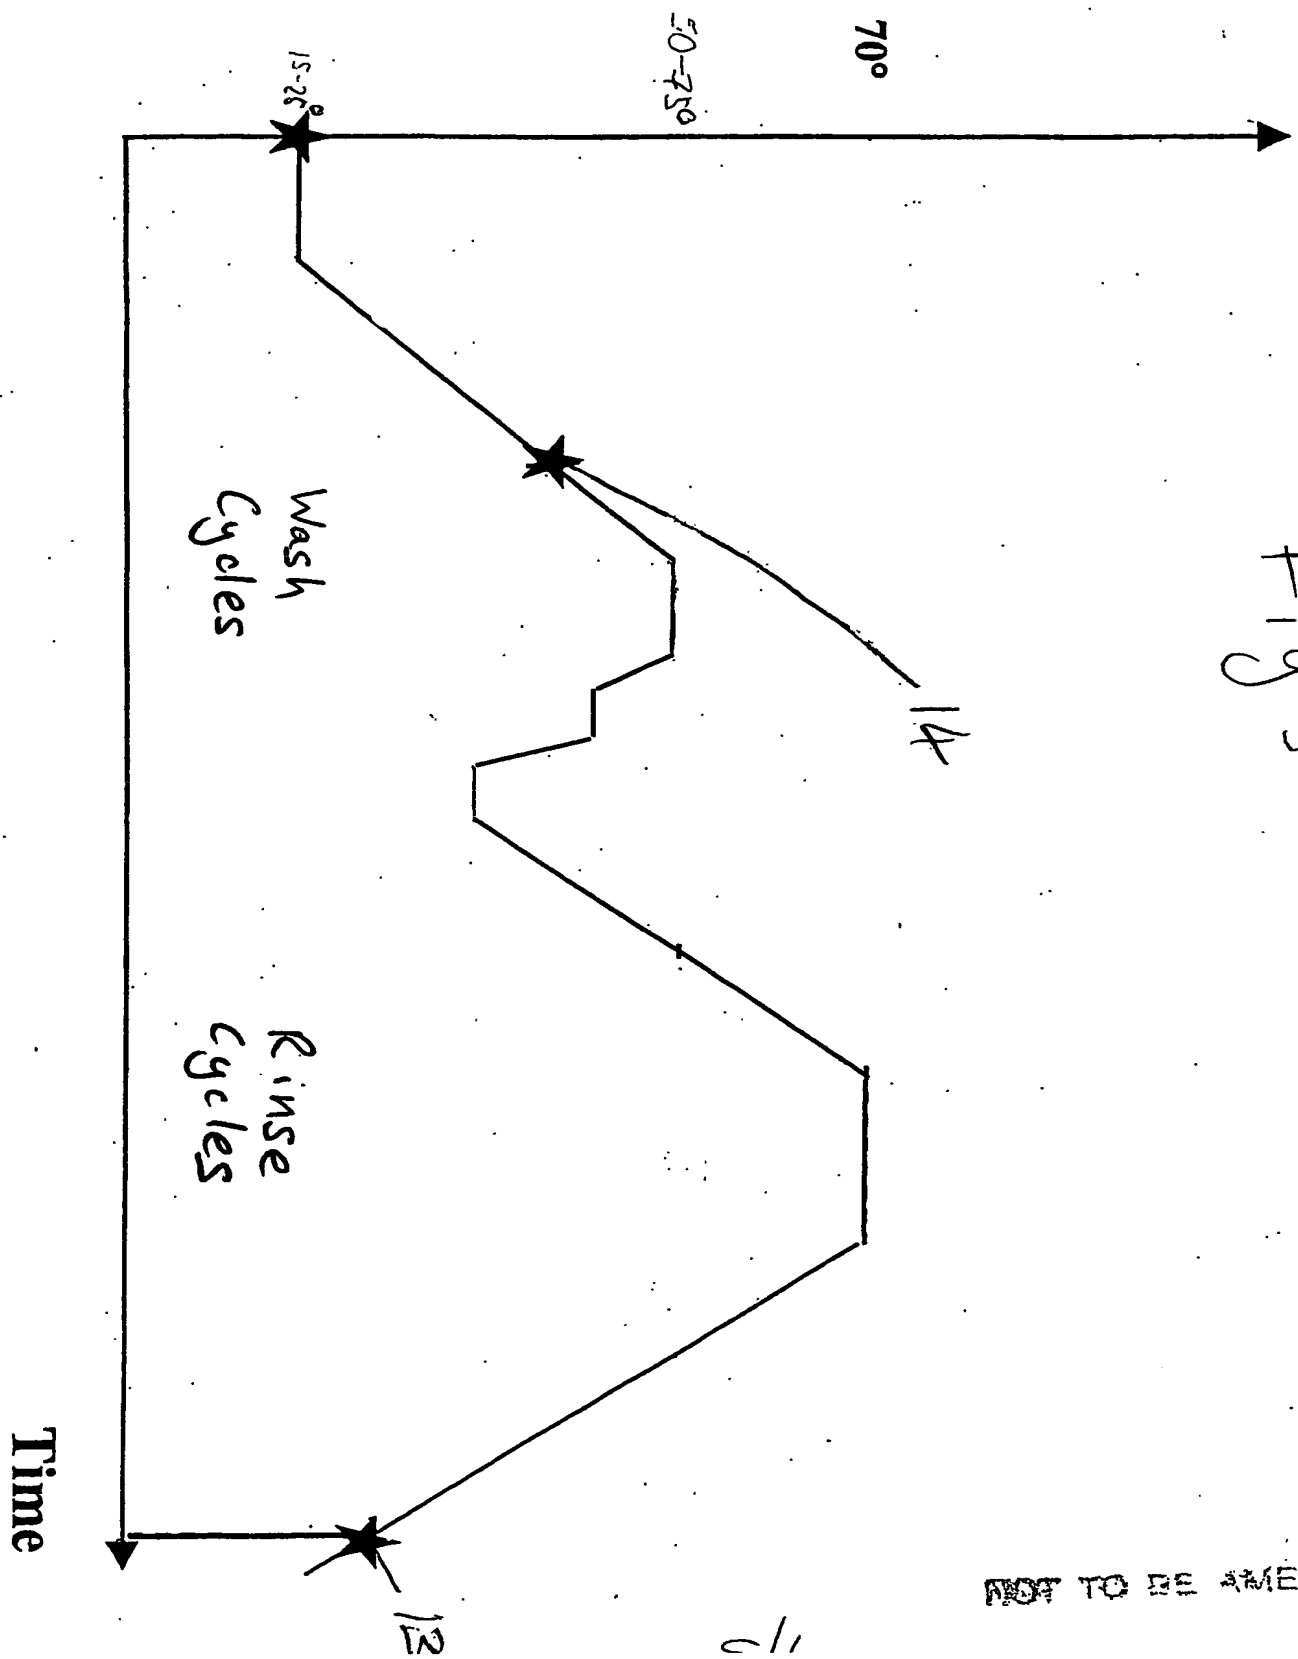


Fig 5

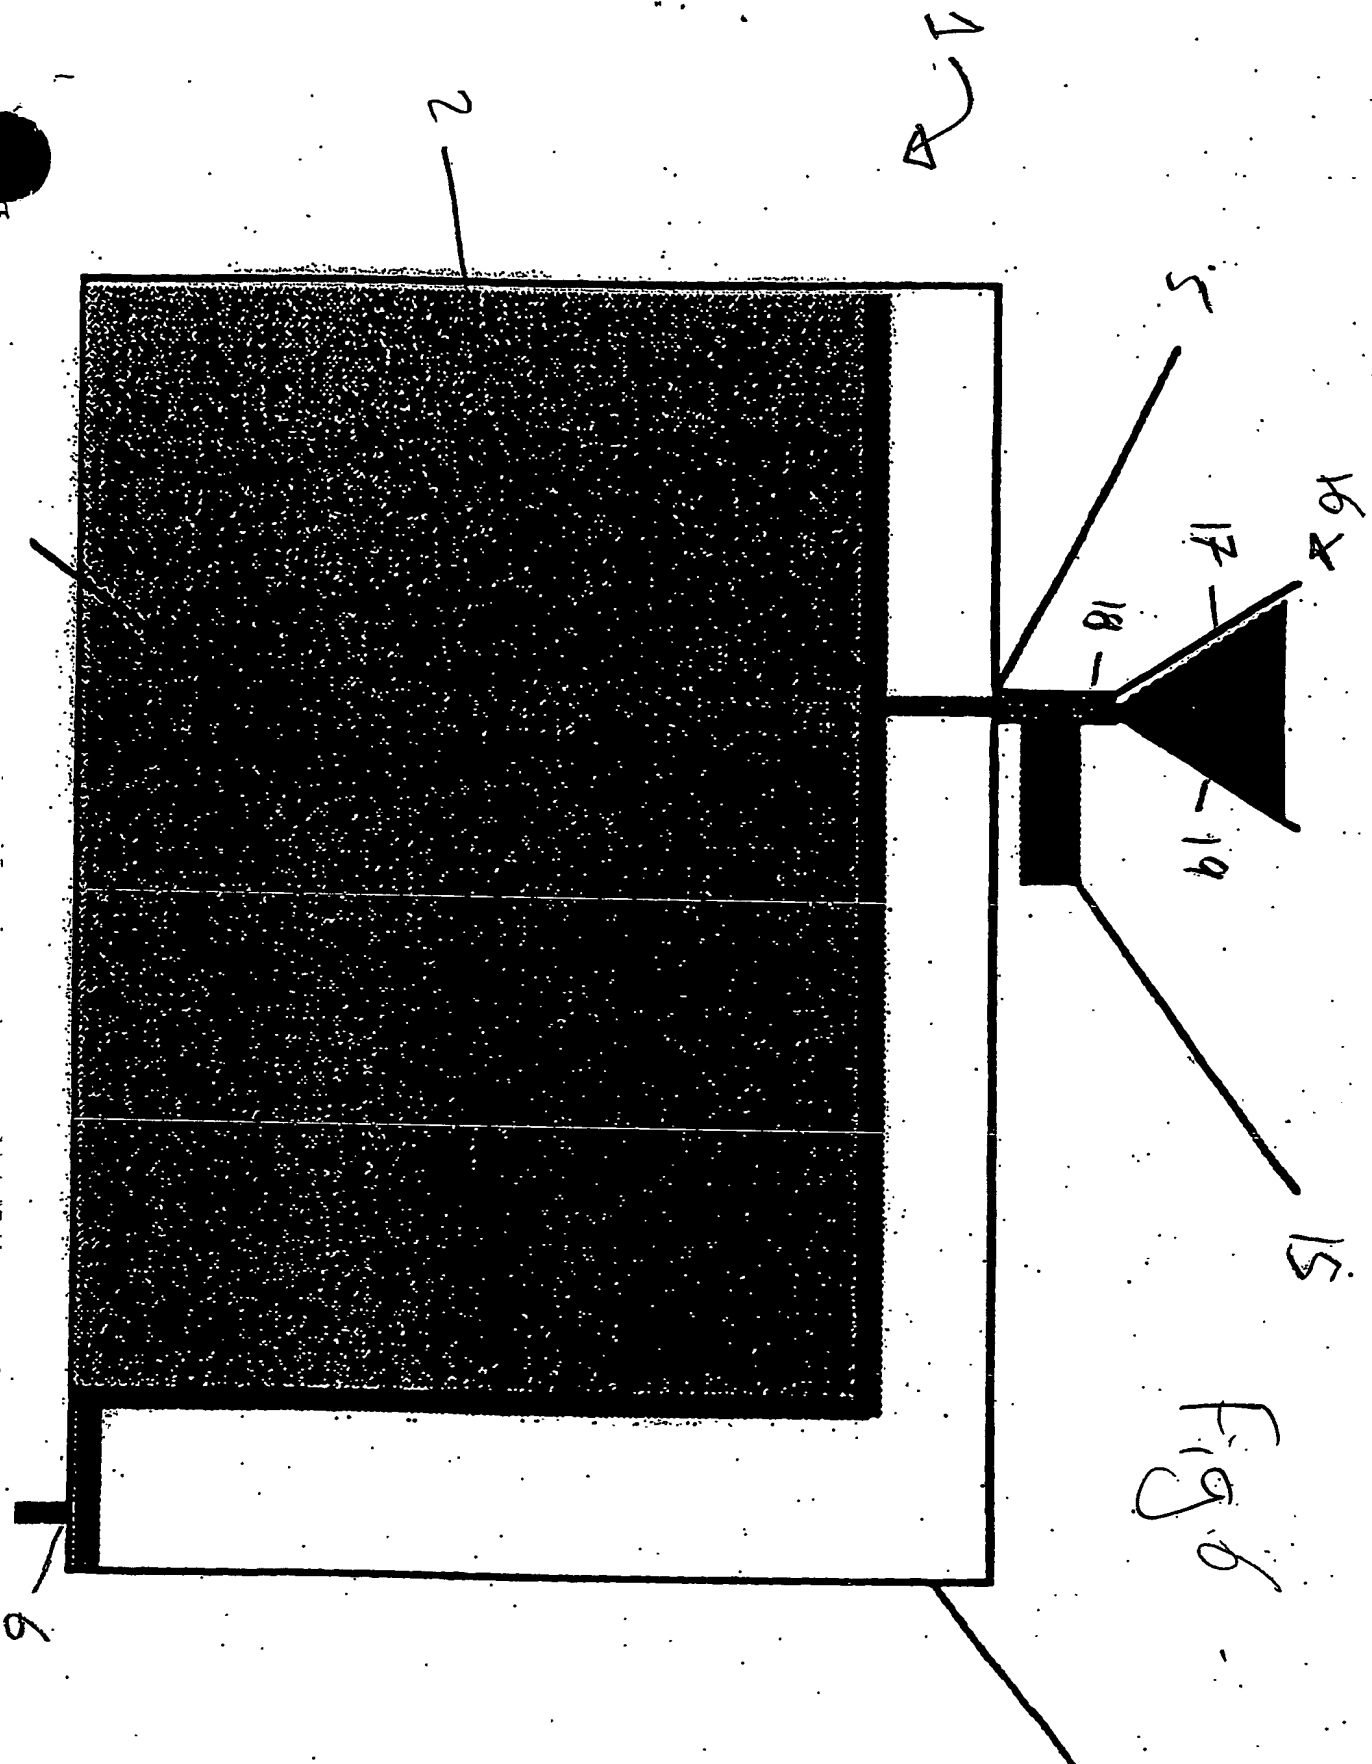

NOT TO BE AMENDED

10/16

THE PATENT OFFICE

08 JUL 2004

Received in Patents
International Unit

PCT/GB2004/002479



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.